
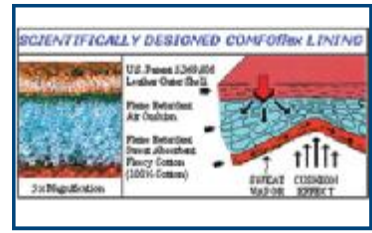


COMFOflex[®]**WELDING GLOVES**

Cotton lining



Foam lining

COMFOflex[®] lining**COMFOflex**[®]**10-2000**S, L, XL, XXL
LH
L/18"35 cm.
46 cm. (L/18")

- A-grade cow split leather
- Hand **COMFOflex**[®] lined
- Cuff cotton lined
- Wide body model
- Size L also available in Left Hand only pairs (LH) and 18" (46 cm.)




95%

KEVLAR[®] 4 ply + 5 ply**COMFOflex**[®]EN 12477 (09.2005) TYPE A
TÜV BP 60017622 0001
TÜV 21128415 002

Ω ELECTROSTATIC TESTED Ω

10-2178

L



35 cm.

- Same features like the 10-2000 glove
- One finger model




95%

KEVLAR[®] 4 ply**COMFOflex**[®]EN 12477 (09.2005) TYPE A
TÜV BP 60017622 0001
TÜV 21128415 002

Ω ELECTROSTATIC TESTED Ω

10-2087

L, XL



35 cm.

- A-grade cow shoulder split leather
- Hand full **COMFOflex**[®] lined
- Cuff cotton lined
- Wide body model



95%

KEVLAR[®] 3 ply**COMFOflex**[®]EN 12477 (09.2005) TYPE A/B
TÜV BP 60017622 0001
TÜV 21128415 002

Ω ELECTROSTATIC TESTED Ω

COMFOflex®

WELDING GLOVES

10-2900



L, XL



36 cm.

- A-grade cow split leather
- Hand COMFOflex® and wool lined
- Cuff flame retardant lined
- Wide body model



70%

250°C CONTACT

KEVLAR® 4 ply



STEERSOtuff®

EN 12477 (09.2005) TYPE A
TÜV BP 60017622 0001
TÜV 21128415 002



10-2655



M, L, XL, XXL



37 cm.

- Hand bison leather
- Cuff split cowhide
- Inner back of the hand COMFOflex® lined
- Cuff flame retardant lined
- CHROMIUM < 2 mg./kg.



30%

250°C CONTACT

KEVLAR® 3 ply + 4 ply + 5 ply



ThunderingBison™

EN 12477 (09.2005) TYPE A/B
TÜV BP 21146065 001
TÜV 556-10-0071/01



10-2850



L, XL



36 cm.

- Grain and split deerskin
- Backhand COMFOflex® lined and inner cuff flame retardant lined
- Highest comfort level



30%

KEVLAR® 4 ply



DEERSOsoft®

EN 12477 (09.2005) TYPE A/B
TÜV BP 60017622 0001
TÜV 21128415 002



COMFOflex®

WELDING GLOVES

10-2750



L, XL, XXL



36 cm.

- A-grade cow grain leather
- Backhand COMFOflex® lined and cuff cotton lined
- Back palm reversed grain (suede)
- Oil and water resistant
- Excellent quality and comfortable to wear



30%

250°C CONTACT

KEVLAR® 4 ply



STEERSOtuff®

EN 12477 (09.2005) TYPE A/B
TÜV BP 60017622 0001
TÜV 21128415 002



Ω ELECTROSTATIC TESTED Ω

10-2755



L, XL



36 cm.

- Combined features:
- on the back of our 10-2385
- and the innerhand of the 10-2750 with extra comfort padges
- Oil and water resistant
- Excellent quality and comfortable to wear



30%

350°C CONTACT

KEVLAR® 4 ply



COMFOflex®

EN 12477 (09.2005) TYPE A/B
TÜV BP 60022511 0001
TÜV 21136762 003



10-2385



L, XL, XXL



35 cm.

- A-grade cow side split leather
- Hand full COMFOflex® lined and cuff full flame retardant lined
- Wide body model
- Aluminized back is designed to reflect radiant heat and has a layer of split deerskin in between the back and COMFOflex® lining



35%

KEVLAR® 4 ply



COMFOflex®

EN 12477 (09.2005) TYPE A
TÜV BP 60017622 0001
TÜV 21128415 002



+



=




44-3006LB, 44-3008LB, 44-3009BF:
see page 36

COTTON LINED WELDING GLOVES

10-2392



L, XL
LH/L, LH/XL
L/18"



34 cm.
46 cm. (L/18)

- Cow shoulder split leather
- Full cotton lined
- Straight thumb helps the user to handle a mig gun a lot better
- Size L also available in 18" (46 cm.)
- Size L and XL also available in Left Hand only pairs (LH)



95%

KEVLAR® 3 ply

EN 12477 (09.2005) TYPE A/B
TÜV BP 60017622 0002
TÜV 21128415 002



10-2392 MIT



L



34 cm.

- One finger model of glove 10-2392
- Cow shoulder split leather
- Full cotton lined



95%

KEVLAR® 3 ply

EN 12477 (09.2005) TYPE A/B
TÜV BP 60017622 0002
TÜV 21128415 002



10-2392GB



L, XL



34 cm.

- Same as glove 10-2392, but *Golden Brown™* model
- Cow shoulder split leather
- Full cotton lined
- Straight thumb helps the user to handle a mig gun a lot better



95%

KEVLAR® 3 ply


EN 12477 (09.2005) TYPE A/B
TÜV BP 60017622 0002
TÜV 21128415 002



10-2150



L, XL



36 cm.

- Innerhand is made of cow grain leather to make it oil and water resistant
- All other parts of the glove are made of cow split leather
- Full cotton lined



95%

250°C CONTACT




EN 12477 (09.2005) TYPE A/B
TÜV BP 60022511 0001
TÜV 21136762 003



COTTON LINED WELDING GLOVES


10-2101



	L, XL		34 cm.
<ul style="list-style-type: none"> - The 10-2101 is our general purpose glove of the range - Cow shoulder split leather - Full cotton lined 			
 <p>90%</p>			


EN 12477 (09.2005) TYPE A/B
TÜV BP 60017622 0003
TÜV 21128415 002

CE




10-2101GB



	L, XL		34 cm.
<ul style="list-style-type: none"> - Same as glove 10-2101, but <i>Golden Brown™</i> model - Cow shoulder split leather - Full cotton lined 			
 <p>90%</p>			

EN 12477 (09.2005) TYPE A/B
TÜV BP 60017622 0003
TÜV 21128415 002

CE



Weldas sizing incorporates EN 420 size standards, the lining and the intended use

(EN 420)

GLOVE AND HAND SIZE REFERENCE

Hand Size Index	7½	8½	9	9½	10½
Weldas Size Label	S	M	L	XL	XXL
Measurement mm	190	216	229	241	267



WWW.WELDAS-CE.COM

SOFTouch™

TIG WELDING GLOVES



**Weldas® SOFTouch™ TIG gloves:
10-1003, 10-1005, 10-1009 and 10-1050
have seamless index finger for better feed of TIG wires!**

10-1003



M, L, XL, XXL



35 cm.

- Oil and abrasion resistant
- Reversed (suede) grain pig leather
- Seamless index finger

KEVLAR® 3 ply

SOFTouch™


EN 12477 (09.2005) TYPE A/B
TÜV BP 60017622 0003
TÜV 21128415 002



10-1005



S, M, L, XL, XXL



35 cm.

- Very smooth and pliable
- Calfskin grain leather
- Seamless index finger

KEVLAR® 3 ply

SOFTouch™

EN 12477 (09.2005) TYPE A/B
TÜV BP 60017622 0003
TÜV 21128415 002



Ω ELECTROSTATIC TESTED Ω

10-1007



M, L, XL



35 cm.

- Goatskin palm
- A-grade cow split leather back and cuff

KEVLAR® 3 ply

SOFTouch™

EN 12477 (09.2005) TYPE B
TÜV BP 60017622 0003
TÜV 21128415 002



SOFTouch™

TIG WELDING GLOVES

10-1009



M, L, XL, XXL



35 cm.

- Hand made of goatskin
- Very soft and excellent feeling
- Cuff made of split cow leather
- Seamless index finger

KEVLAR® 3 ply

SOFTouch™

EN 12477 (09.2005) TYPE B
 TÜV BP 60017622 0004
 TÜV 21128415 002



412X4X



2111



www.weldas.com

Ω ELECTROSTATIC TESTED Ω

10-1050



M, L, XL, XXL



32 cm.

- Outer hand made of soft black grain cow leather
- White grain goat leather spacers on the sides of the fingers
- Curved cuff made of supple split cow leather trimmed at the edge with white grain goat leather
- Thin fleecy, flame retardant lining at the back of the hand
- Seamless index finger

KEVLAR® 3 ply

SOFTouch™

EN 12477 (2001 + A1 : 2005)
 TYPE A/B
 TÜV BP 60042511 0001
 TÜV 21177510 001



412X4X



2142



www.weldas.com

10-2304



M, L, XL, XXL



32 cm.

- Hand made of deerskin
- Very soft feeling
- Cuff made of split cow leather

KEVLAR® 3 ply



DEERSOsoft®

EN 12477 (09.2005) TYPE A/B
 TÜV BP 60017622 0004
 TÜV 21128415 002



413X4X



2133



www.weldas.com

10-2644



M, L, XL, XXL



32 cm.

- Hand bison leather
- Cuff split cowhide
- **CHROMIUM < 2 mg./kg.**



KEVLAR® 2 ply + 3 ply



ThunderingBison™

EN 12477 (09.2005) TYPE A/B
 TÜV BP 21146065 001
 TÜV 556-10-0071/01



412X4X



2143



www.weldas.com

DRIVER GLOVES

10-2064



L, XL



24 cm.

- Durable split cow leather

EN 388 (2003)
TÜV BP 60017626 0002
TÜV 21128304 002



10-2336



M, L, XL



24 cm.

- Palm made of cow grain side leather
- Back made of split cow leather
- Extra fingertip sensitivity



EN 388 (2003)
TÜV BP 60017626 0002
TÜV 21128304 002



10-2633



M, L, XL, XXL



25 cm.

- Innerhand made of grain bison leather
- Back made of split cow leather
- **CHROMIUM < 2 mg./kg.**



KEVLAR® 3 ply



ThunderingBison™

EN 388 (2003)
TÜV BP 21146066 001
TÜV 556-10-0071/02



10-2700



S, M, L, XL, XXL



26 cm.

- Cow grain side leather of the highest quality
- Oil and water resistant



STEERSOtuff®

EN 388 (2003)
TÜV BP 60017626 0002
TÜV 21128304 002

