


Lava Brown™ CLOTHING



Lava Brown™ products are made of high quality A-grade side split cow leather

44-7300 Jacket full leather

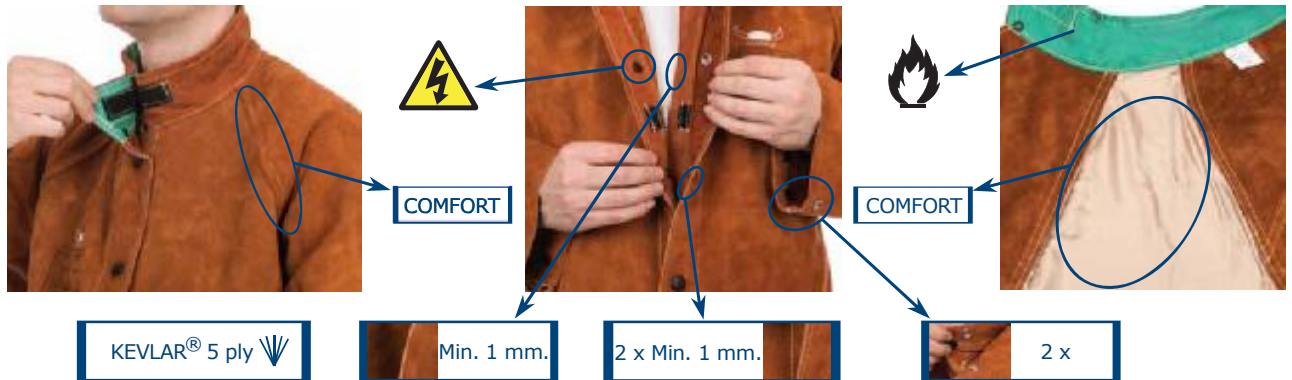

- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.

| | | |
|--------------|--------|---------|
| 44-7300M | 76 cm. | 100 cm. |
| 44-7300L | 81 cm. | 112 cm. |
| 44-7300XL | 86 cm. | 124 cm. |
| 44-7300XXL | 91 cm. | 136 cm. |
| 44-7300XXXL | 96 cm. | 148 cm. |
| 44-7300XXXXL | 96 cm. | 160 cm. |



EN ISO 11611:2007
CLASS 2/A1
TÜV BP 60041277 0001
TÜV 21173205 001



**EN ISO 11611:2007
CLASS 2/A1**

44-7300/P Jacket with flame retardant back



- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.
- Back: flame retardant cotton 315 gr/m²

| | | |
|---------------|--------|---------|
| 44-7300M/P | 76 cm. | 100 cm. |
| 44-7300L/P | 81 cm. | 112 cm. |
| 44-7300XL/P | 86 cm. | 124 cm. |
| 44-7300XXL/P | 91 cm. | 136 cm. |
| 44-7300XXXL/P | 96 cm. | 148 cm. |



EN ISO 11611:2007
CLASS 2/A1
TÜV BP 60041277 0001
TÜV 21173205 001



**EN ISO 11611:2007
CLASS 2/A1**

Lava Brown™ CLOTHING

44-7300/P-AQ Ladies jacket with flame retardant back



- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.



| | | |
|----------------|--------|---------|
| | ↕ | ↔ |
| 44-7300S/P-AQ | 76 cm. | 98 cm. |
| 44-7300M/P-AQ | 76 cm. | 110 cm. |
| 44-7300L/P-AQ | 81 cm. | 120 cm. |
| 44-7300XL/P-AQ | 86 cm. | 130 cm. |

44-7800 Cape sleeve



- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.



EN ISO 11611:2007
CLASS 2/A1
TÜV BP 60041277 0001
TÜV 21173205 001



**EN ISO 11611:2007
CLASS 2/A1**

| | | |
|-------------|---------|---|
| | ↕ | ↔ |
| 44-7800M | 100 cm. | |
| 44-7800L | 112 cm. | |
| 44-7800XL | 124 cm. | |
| 44-7800XXL | 136 cm. | |
| 44-7800XXXL | 148 cm. | |

44-78.. Apron for cape sleeves



- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.



EN ISO 11611:2007
CLASS 2/A1
TÜV BP 60041277 0001
TÜV 21173205 001



**EN ISO 11611:2007
CLASS 2/A1**



Lava Brown™ CLOTHING

44-7248

Pants with breast protection and open back



122 cm.

- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.



44-7440

Pants with open back



102 cm.



STEERSOtuff®

EN ISO 11611:2007
CLASS 2/A1
TÜV BP 60041277 0001
TÜV 21173205 001



**EN ISO 11611:2007
CLASS 2/A1**

44-7440/7600

Pants with closed back



- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.



STEERSOtuff®

EN ISO 11611:2007
CLASS 2/A1
TÜV BP 60041277 0001
TÜV 21173205 001



**EN ISO 11611:2007
CLASS 2/A1**

- 44-7440/7600M
- 44-7440/7600L
- 44-7440/7600XL
- 44-7440/7600XXL
- 44-7440/7600XXXL

- 110 cm.
- 112 cm.
- 116 cm.
- 122 cm.
- 128 cm.

44-7440/7648

Pants with breast protection and closed back, bib and brace



- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.



STEERSOtuff®

EN ISO 11611:2007
CLASS 2/A1
TÜV BP 60041277 0001
TÜV 21173205 001



**EN ISO 11611:2007
CLASS 2/A1**

- 44-7440/7648M
- 44-7440/7648L
- 44-7440/7648XL
- 44-7440/7648XXL
- 44-7440/7648XXXL
- 44-7440/7648XXXXL

- 136 cm.
- 140 cm.
- 144 cm.
- 148 cm.
- 152 cm.
- 156 cm.

Lava Brown™ CLOTHING

44-71.. Aprons



- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.
- Self-balancing strap system

| | | |
|-----------|---------|--------|
| | ↕ | ↔ |
| 44-7124 | 60 cm. | 60 cm. |
| 44-7136 | 91 cm. | 60 cm. |
| 44-7142 | 107 cm. | 60 cm. |
| 44-7142 W | 107 cm. | 80 cm. |
| 44-7148 | 122 cm. | 60 cm. |
| 44-7148 W | 122 cm. | 80 cm. |

COMFORT



44-7124
60x60 cm.



STEERSOtuff®

EN ISO 11611:2007
CLASS 2/A1
TÜV BP 60041277 0001
TÜV 21173205 001



EN ISO 11611:2007
CLASS 2/A1

44-7023 Sleeves



- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.
- Balancing strap system

44-7023

↕
58 cm.



STEERSOtuff®

EN ISO 11611:2007
CLASS 2/A1
TÜV BP 60041277 0001
TÜV 21173205 001



EN ISO 11611:2007
CLASS 2/A1

44-7028 Heavy duty arm guard (piece)



- Heavy duty
- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.
- COMFOflex® lining used
- Hook and loop closure
- Inside 520 gr./m² flame retardant fabric
- See for extension 44-7114EXT (page 20)

44-7028

↕ ↻ ↻
35 cm. 32-41 cm. 35-45 cm.



STEERSOtuff®

NEW
HEAVY DUTY

Golden Brown™ CLOTHING

44-7106 Spats for shoe protection



- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.
- With under the shoe an elastic strap to secure shoe top cover

44-7106

33-43 cm. 15 cm.



EN ISO 11611:2007
CLASS 2/A1
TÜV BP 60041277 0001
TÜV 21173205 001



**EN ISO 11611:2007
CLASS 2/A1**

44-7114 Spats for leg and shoe protection



- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.
- With bendable insert at shin and shoe top to allow shape formation

44-7114

37-47 cm. 36 cm.



EN ISO 11611:2007
CLASS 2/A1
TÜV BP 60041277 0001
TÜV 21173205 001



**EN ISO 11611:2007
CLASS 2/A1**

44-7114EXT Diameter extension for 44-7114 and 44-7028



44-7114EXT + 44-7114 = 52-62 cm.

- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.
- 15 cm. wide extension for 44-7114 and 44-7028

44-7114EXT

15 cm.



EN ISO 11611:2007
CLASS 2/A1
TÜV BP 60041277 0001
TÜV 21173205 001



**EN ISO 11611:2007
CLASS 2/A1**